

SR6003

Dolby TrueHD® / dts®-HD Master Audio AV Receiver



From its sleek compound-curve front panel to the high definition audio design, the SR6003 surround sound receiver contains a stunning array of technologies to increase your A/V enjoyment. Seven amplifier channels, each capable of delivering 100 continuous watts. Full HDMI 1.3 capability. A complete array of new processing technologies. The SR6003 demonstrates once again that Marantz leads the way to home entertainment.

- **Sophisticated new aluminum/reinforced resin front panel**
- **High Bit Rate Audio capability: Dolby TrueHD, dts-HD Master Audio**
- **HDMI v1.3a repeating (3 in/2 out)**
- **Audyssey MultEQ**
- **M-DAX for compressed audio**
- **USB input for Audio playback**
- **Simple color GUI**
- **10bit Video converter to HDMI (interlaced to progressive and scaler)**
- **Dual HDMI and component video outputs**
- **Analog and digital multi-zone outputs**
- **In-line seven channel amplifiers/High definition audio design**
- **New FL display**
- **Updated LCD backlit Learning remote controller**
- **<16" Shallow chassis**
- **Various control interfaces: RS-232C, Flasher in, DC trigger)**
- **Multiple radio system (AM/FM/XM/SIRIUS)**
- **Fold-up door for clean looking front panel**

marantz®
LIFE AMPLIFIED™



SR6003

Dolby TrueHD® / dts®-HD Master Audio AV Receiver

FEATURES

MULTICHANNEL/SURROUND	
Number of Channels	7 ch Amp. 7.1 ch Processing
THX	-
dts	HD Master & High Res.Audio/ES/96/24/Discrete & Matrix 6.1/Neo6
Dolby	TrueHD/Digital Plus&EX/Pro Logic IIx/Virtual Speaker/Headphone
DSD (SACD)	DSD Decoding via HDMI
Other	SRS-CSII/NEURAL THX
SOUND ENHANCEMENTS	
HDCD Decoder	•
Current Feedback Topology	-
Discrete Amplification	•
Power Transformer	EI
D/A Conversion	192kHz/24-Bit
Digital Signal Processing	TI Aureus 32-Bit
Video Off	•
Source Direct	•
Chassis	Metal
Variable X-over	•
Display Off	•
Video Up-conversion	•
Auto Calibration	Audyssey MultEQ
Satellite Radio Ready	XM / Sirius
AM/FM tuner	•
Bass management	•
Lip-sync (digital audio delay)	•
Software Upgradable (RS-232C)	•

IN/OUTPUTS


VIDEO	
HDMI In	3
Component In	3
S-Video In	5 (inc. front)
Composite In	5 (inc. front)
HDMI Out	2
Component Out	2
S-Video Out	2 (inc. Monitor Out)
Composite Out	2 (inc. Monitor Out)
AUDIO	
Analog L&R In	8 (incl. Front & AUX2(L&R of 7.1 ch In))
Analog L&R Out	3
Digital Optical In	4 (inc. front)
Digital Coaxial In	2
Digital Optical Out	1
Digital Coaxial Out	0
Other	USB In: 1(Front)

IN/OUTPUTS (continued)

OTHER	
Pre-Amplifier Out	7.1 ch
Main Amplifier In	-
Multi-Channel In	7.1 ch
Multi-Room Audio Out	Analog L&R for 2nd Zone, Assignable Digital Opt Out for 3rd Zone
Multi-Room Video Out	-
Multi-Room Speaker Out	•
Speaker A/B	•
Networking	-
External control	(RS232C)
DC Triggers	Out: 1
D-Bus Remote (RC-5) In/Out	1/1
Flasher In/IR Receiver In/Emitter out	1/0/0
Front Panel A/V Inputs	S-Video/Video/Analog L&R/Digital Optical
Headphone Out	1
AC Outlets (Switched/Unswitched)	1/1

SPECIFICATIONS

AUDIO SECTION	
Power Output (8 Ohm)	100W x7 (20Hz -20kHz)
S/N Ratio	105db (Analog Input, Pure Direct)
Freq. Response (Analog In)	8Hz - 100kHz (+/- 3 dB)
Freq. Response (Dig In)	8Hz - 45kHz (+/- 3 dB)
TUNER SECTION FM	
Frequency Range	87.5 - 108.0MHz
S/N Ratio (Mono/Stereo)	75/70 dB
TUNER SECTION AM	
Frequency Range	520 - 1710kHz
S/N Ratio	50 dB
VIDEO SECTION	
Video Freq. Response (Component)	5Hz - 80MHz (- 1 dB)
Video Freq. Response (Composite, S-Video)	5Hz - 8MHz (- 1 dB)
Signal to Noise	60dB
GENERAL	
Color	Black
Front Panel	Aluminum/Glass-reinforced resin
Remote Controller	System remote with Learning & Backlight
Power Requirement	AC 120V/60Hz
Power Consumption	600 W
Dimensions W" x H" x D" (Inches)	17-5/16" x 6-5/16" x 15-5/16"
Weight (lbs)	29.1

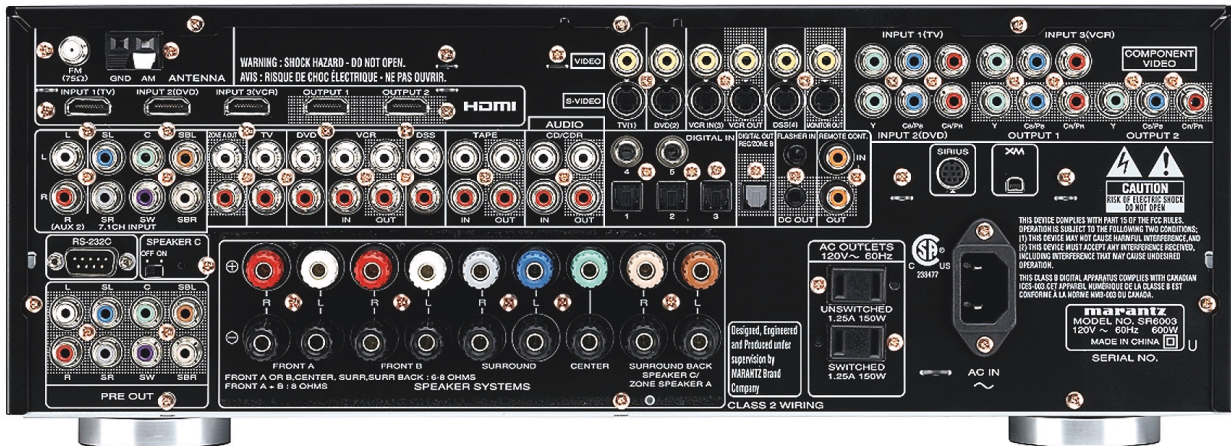

marantz®

LIFE AMPLIFIED™

*All specifications, dimensions and weights are subject to change without notice.

D&M Holdings, Marantz, Marantz America, Inc. or any of its subsidiaries will not assume any liability for errors in this spec sheet which may result in consequential errors being made by retail dealers, designers, custom installers, cabinet makers or end users, etc based upon information contained within this document.

©2008 Marantz America, Inc. • www.marantz.com