

# marantz®

## ZS5300 Multi-Zone Control Amplifier

A 6-Channel Multi-Zone Control Amplifier designed specifically for an all-in-one solution to Custom Distributed Audio. When combined with a Marantz AV Receiver and/or other source components (eg. Music Server, CD Player and Cassette Deck), the ZS5300 transforms your main system into a 'Whole House Audio System'. Add another ZS5300 (up to 3) for a total of 9 zones. Ease of use and installation make the ZS5300 one of the most flexible, comprehensive and perfect audio products ever invented. In terms of sound quality, Custom Retailer (N/D, 2003) thought that the ZS5300 "had the speed and clarity" of our old mono-block amplifiers, the MA500's. They also said, "there was a sense of authority that is missing from lesser amps designed for multi-room use."

- 6 x 60 Watts (All Discrete Amplifier Section)
- Identical Amplifier Stages for all 6 Channels
- Matrix Audio Selector
- Multiple Zone/Source Indicators
- Share the 3 Source Components
- 3 Independent Zones/Rooms
- Major Keypad Compatibility
- Expandable to 9 Independent Zones with Loop Outputs and Selectable 3 IDs
- Party Mode
- Dedicated Pre-out Connection (for the Addition of a High Powered Amplifier such as the MM9340)
- DC Status Trigger Outputs for Keypad
- Local Input/Zone
- D-BUS (RC-5 In/Out) Remote Connection



### FEATURES


Number of Channels	6 (Stereo x 3)
Output Power/Channel (6 ohm)	60W
Power Transformer	R-Core
Compact Class-D Amplifier	•
Discrete Amplifier Stage	•
Matrix Source Switcher	•
Common Input Source	3
Direct Input/Zone	1
Zone Expandable Connection	•
Global Control Function	•
Majority Keypads Compatibility	•
Dual Voltage Capability	•

### IN/OUTPUTS

AUDIO	
Analog L&R In (Common Source)	3
Analog L&R In (Zone Direct)	3
Analog L&R Out	3
Pre Amplifier L&R Out	1 (Zone-3)
Speaker Out	3
OTHERS	
D-Bus Remote (RC-5) In/Out	3
External Control In (Flasher In)	1
Status Out (DC 12V)	3

### SPECIFICATIONS

AUDIO SECTION	
THD (20Hz - 20kHz, 8 ohms)	0.05%
Input Sensitivity / Impedance	300 mV/20 kohm
Frequency Response (+/- 3dB)	10Hz - 30kHz
S/N Ratio	85 dB
GENERAL	
Color	Black
Front Panel	Aluminum
Remote Control	RC5300ZS
Power Requirements	AC 120V / 230V, 60Hz
Power Consumption	100W
Dimension	
W x H x D (Inches)	17 1/8" x 4 1/2" x 13 1/8"
Weight (lbs.)	18.7

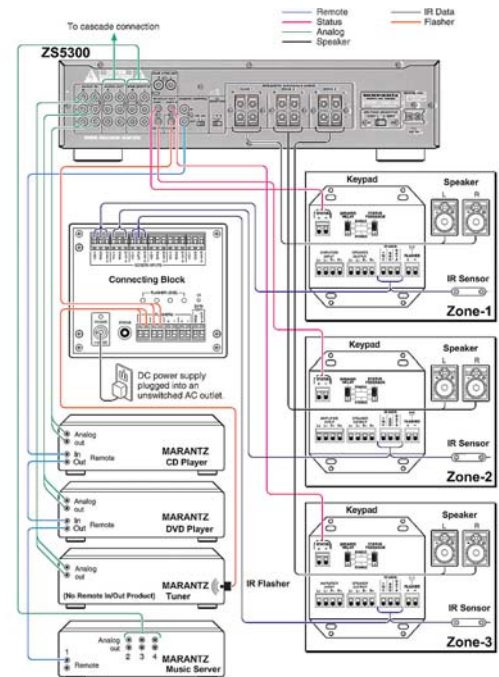

\*All specifications, dimensions and weights are subject to change without notice. D&M Holdings, Marantz, Marantz America, Inc. or any of its subsidiaries will not assume any liability for errors within this document.