


marantz®



SR5014 7.2CH 4K ULTRA HD AV RECEIVER WITH HEOS BUILT-IN

Refine your home cinema with the Marantz SR5014 7.2 channel 4K UHD AV receiver. Enjoy the most musical sound for any source, from vinyl to digital streaming. Envelop yourself with immersive surround formatting from Dolby Atmos and DTS:X. Enjoy seamless voice control from the leading voice agents, multi-room connectivity and advanced HDMI technology.

- 7.2 channel discrete power amplifier, 100W per channel (8-ohm, 20Hz – 20kHz, 0.08% THD 2ch. drive)
- Dolby Atmos, Dolby Atmos Height Virtualization Technology, DTS:X and DTS Virtual:X processing
- 8 HDMI inputs, including 1 HDMI input on the front panel, with full HDCP 2.3 support, plus 2 HDMI outputs including 1 HDMI output supporting eARC function
- 4K/60 Hz full-rate pass-through, 4:4:4 color resolution, HDR 10 and BT.2020, plus Dolby Vision compatibility and Hybrid Log-Gamma (HLG)
- Decodes ALAC, FLAC and WAV lossless files up to 24-bit/192-kHz — plus DSD 2.8MHz and 5.6MHz tracks let you enjoy music exactly as the artist intended
- Marantz proprietary HDAM circuit boards for more detailed, dynamic sound
- Play songs from Spotify, Pandora, Tidal and more via AirPlay 2, Bluetooth and the HEOS app (music streaming services may vary by region)
- Features HEOS Built-in — advanced technology enables multi-room audio, voice control and digital music streaming
- Supports Amazon Alexa, Google Assistant and Apple Siri voice agents — use your voice to control the SR5014
- Auto Low Latency Mode (ALLM) ensures Xbox One users have a more responsive and immersive gaming experience
- Built-in Wi-Fi with 2.4GHz/5GHz dual band support
- Marantz AVR remote app available for iPhone and Android devices
- AKM AK4458 32-bit D/A converters, HDAM circuit boards and Current Feedback circuitry for optimum fidelity and maximum dynamic range

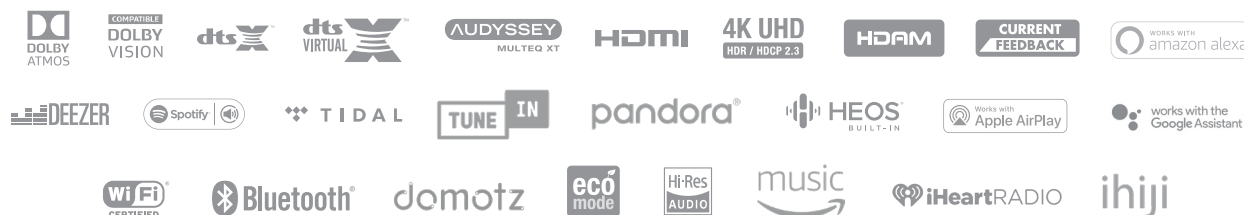

because music matters

marantz®

SR5014 7.2CH 4K ULTRA HD AV RECEIVER WITH HEOS BUILT-IN



Design and specifications are subject to change by Marantz without notice.

FEATURES	SR5014
MULTICHANNEL SURROUND	
DTS HD Master / DTS:X / DTS Neural:X	• / • / •
DTS Virtual:X	•
Dolby TrueHD / Dolby Atmos / Dolby Atmos Height Virtualization	• / • / •
Dolby ProLogic IIz / Dolby Surround	- / •
Multichannel Stereo	•
Max Number of Processing (Preamp) Channels	7.1
Audyssey	MultEQ XT
Audyssey Dynamic EQ / Dynamic Volume	• / •
Compressed Audio Enhancer: MDAX2	•
NETWORK / SOURCES	
HEOS Multi-Room and Streaming / Network Audio Streaming	• / •
Lossy Formats MP3 / WMA / AAC	• / • / •
Lossless Formats FLAC / ALAC / WAV	• / • / •
FLAC HD 192/24 / WAV 192/24 / ALAC 192/24	• / • / •
DSD Audio Streaming	Up to DSD5.6
Gapless Playback	• (FLAC, WAV, ALAC, DSD)
AirPlay2 Audio Streaming	•
Internet Radio (Tuneln)	•
Spotify Connect / Deezer / TIDAL / Napster / Pandora / SiriusXM	• / • / • / • / • / •
Compatible with Remote App (iOS / Android)	Marantz 2016 AVR Remote
Ethernet / Wi-Fi	• / • (dual antenna / dual band)
Bluetooth	•
HDMI	
4K 60Hz 4:4:4 resolution / HDCP 2.3	• / •
eARC (Enhanced Audio Return Channel)	•
Analog to HDMI Scaling	480i/576i up to 4K 30/25/24
HDMI to HDMI Scaling	up to 4K 30/25/24
GUI Overlay on HDMI	•
HDR / HLG / Dolby Vision	• (HDR10) / • / •
ALLM (Auto Low Latency Mode) Pass-through for Gaming	•
3D Signal Pass-Through	•
HDMI Pass-Through in Standby Mode	•
MULTIROOM / CI	
HEOS Multi-Room Integrated	•
HEOS Link Compatibility: IR / IP	• / •
Multi-Room Zones	2
Zone Audio Source: HDMI / Opt, Coax / Network, USB / Analog	• (2CH) / • (2 CH) / • / •
IP Control / RS232 Control / Web Control / App Control	• / • / • / •
Domotz Pro / IHJJI / OvrC compatible	• / • / •
INPUTS/OUTPUTS	
VIDEO	
Composite In / Out	2+1 / 1
Component In / Out	2 / 1
HDMI In / Out	7+1 / 2

AUDIO	
Analog In / Out	4+1 / -
Phono (MM) In	•
Digital In: Optical / Coaxial	2 / 2
Multi-Room Out: Analog / Digital	1 / -
USB Audio / Made for iPod / Made for iPhone	• / - / -
Multichannel Pre Out	• (7.2)
Subwoofer Out	2
OTHER	
Speaker Terminal: Gold Plated Screw / Regular Screw	• / -
Speaker A / B	Assignable
Bi-Amp Drive	Assignable
Multi-Room Speaker Terminal	Assignable
Front Inputs: Audio / Composite / Digital (Opt) / HDMI / USB	• / • / - / • / •
OTHERS	
FL Display	Port Hole
Graphic User Interface - GUI	Advanced
ISF Certification	•
GUI Languages	3
Setup Assistant	•
Smart Select	•
Firmware Update by Network / USB	• / •
Variable Cross Over	•
Optimized Bass Redirection	•
Bass Sync	-
ECO Mode	•
Auto Power Off	•
Sleep Timer	•
SPECIFICATIONS	
Number of Poweramps	7
Number of Speaker Terminals	7
Power Output (8 ohm, 20 Hz - 20 kHz, 0.08% 2ch Drive)	100 W
Power Output (8 ohm, 20 Hz - 20 kHz, 0.05% 2ch Drive)	140 W
Power Output (6 ohm, 1 kHz, 10% 1ch Drive)	200 W
GENERAL	
Available Colors	Black
System Remote Control	RC035SR
Power Consumption in W	650
Power Consumption No-Sound (ECO on/off) in W	45 / 75
Standby Consumption in W	0.2 (with CEC 0.5)
Maximum Dimensions	
Antenna Horizontal: W x D x H	17.3 x 13.7 x 6.3 in
Antenna Vertical: W x D x H	17.3 x 13.7 x 9.1 in
w/o Antenna: W x D x H	17.3 x 13.3 x 6.3 in
Weight	22.1 lbs
UPC	
NA	SR5014/U1B
	699927221751
	Black

Sound United
1 Viper Way
Vista, CA 92081
United States

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by D&M Holdings Inc. is under license. Dolby, Dolby Atmos, and the double-D symbol are trademarks of Dolby Laboratories. DTS, the Symbol, DTS in combination with the Symbol, DTS:X, and the DTS:X logo are registered trademarks or trademarks of DTS, Inc. in the United States and/or other countries. The Spotify software is subject to third party licenses found here: www.spotify.com/connect/third-party-licenses. Other trademarks and trade names are those of their respective owners. Marantz is a trademark or registered trademark of D&M Holdings, Inc.

* All specs can be subject to change.